



CAPTAIN

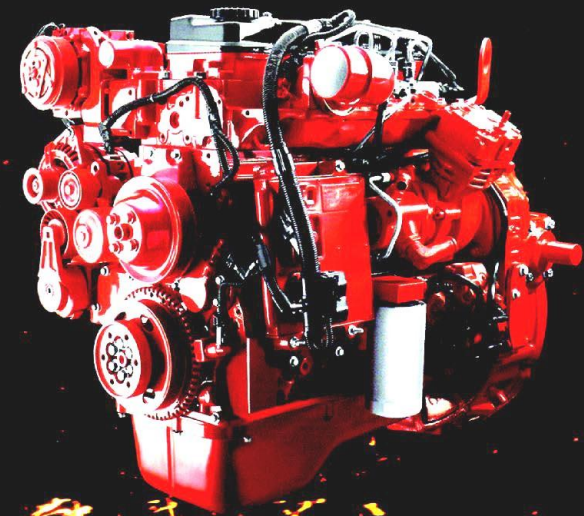

Prominent Engine

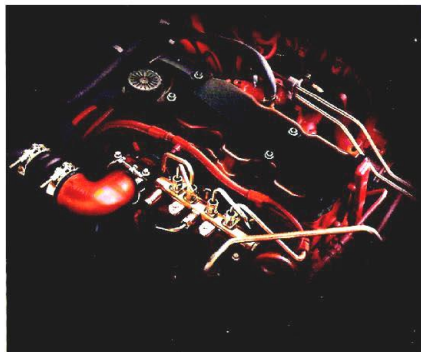

World-Class powerful Cummins engine are equipped with four core technologies, i.e., turbo-charge, intelligent electrical operation, discharge treatment system and filtration system;

125-170 horsepower output strong power;

Easy operation, economic fuel consumption.

Model: EQB125-20, Displacement: 3922cc,
Horse Power: 125hp/2800rpm, Euro II.

High-efficiency Gear-Box



Adopting Dongfeng original designed gearbox; bearing bigger torque with large-dimension gear-box to produce greater transmission performance;

Adopting Dongfeng unique rear axle and world leading quality to ensure prominent durability;

Adopting large-gear main decelerator to realize optimal reduction ratio and optimal power matching.



G h a n d h a r a

D F (P v t)

L t d

...reliability on wheels

Driving & Sitting


Adopting a double cone synchronizer gearbox to conveniently select or change the gear and comfortable drive;
Designing the distance from the accelerator pedal to the brake pedal by taking the ergonomics as the principal to make the operation more comfortable;

2030mm cab external width to accommodate multiple persons with wide space;

Assuring the drivers and passengers to be comfortable in the long distance driving at the greatest degree with ergonomical seat and steering wheel design.

Dongfeng Captain - C, Specification

Engine	Wheel Base (mm)	3800				
	Make	CUMMINS EQB-125-20				
	Type	Turbo-charged & Intercooler, 4 Cylinder Diesel Engine				
	Horse Power	125hp @2800rpm				
	Torque	410Nm @1500rpm				
	Displacement	3922cc				
	Bore & Stroke	102 x 120				
Transmission	Manual, 5 Forward (Over Drive) & 1 Reverse					
Vehicle Dimensions (mm)	Length 6970 x Width 2220 x Height 2410					
Emission	EURO II					
Clutch Type & Size	Dry Single plate, diaphragm type with dumper springs, hydraulic comfort with auto adjuster. Clutch Size 12.8 inch.					
Gear Ratio	1 st	2 nd	3 rd	4 th	5 th	Reverse Gear
	4.763	2.808	1.594	1.000	0.756	R4.990
Final Gear Ratio	4.875					
Captain-C Turning Radius	7.5 m					
Gradeability	30%					
Ground Clearance	176 mm					
Front Overhang	1160 mm					
Rear Overhang	1945 mm					
Tread Front	1750 mm					
Tread Rear	1586 mm					
Cabin	Single Row, Reversible					
Cargo Container Length	5120 mm / 17 Feet					
Frame (mm)	192					
Front Axle (T)	2.2					
Rear Axle (T)	5					
Brakes	Service brake					
Parking Brakes	Parking Brake Air with Exhaust Brake					
Payload (kg)	5,150					
Curb Weight (kg)	3,750					
GVW (kg)	8,900					
Tyre Size	7.50R16					
Battery (V)	12Vx2					
Air Conditioner	Optional					
Steering	Telescopic and Tilt Steering column with locking device, recruiting ball with hydraulic booster integral type.					
Suspension	(F) Semi Elliptical leaf springs with double acting shock absorbers.					
	(R) Semi elliptical main & auxiliary leaf springs with shock absorber					

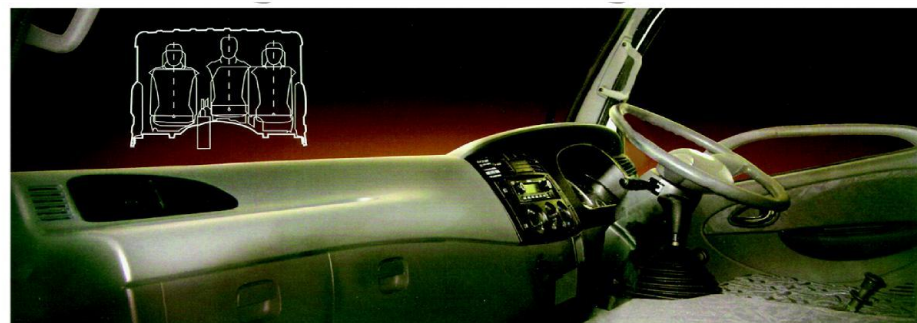

Passive Safety

Light truck nationally taking the lead to pass ECE R29 frontal crash test capping test in the industry to assure safe and reliable quality.


Adopting high-rigidity cab and installing a buffer beam inside the door so as to protect drivers and passengers in the greatest degree;

Cabs adopt vehicle-specialized cold rolled steel plate from WuGang or BaoGang (China's top steel manufacturing factories) and an entire vehicle has more than 3200 welding spots to ensure the safety of the drivers and passenger.



It is the first light duty truck in china to pass ECE R29 top capping test

APPLICATIONS



The above mentioned parameters are only for your reference, please check real vehicle referring to actual equipment.

 **Ghandhara DF (Pvt) Ltd.**

Head Office: F-3, Hub Chowki Road, S.I.T.E, Karachi. UAN # 021-111-190-190, Tel: 021-32556901-10, Fax: 021-32556911-12
Rawalpindi Office: Gammon House Plot no. 400/2 Peshawar Road, Rawalpindi. Ph: 051-5465742 Fax: 051-5465503
Lahore Office: Chowk Al-Saeed, Nain Sukh, Sagiyan By Pass, Lahore. Ph: 042-37163931 Fax: 042-37163932
Website : www.ghandharadf.com. Facebook Link : www.facebook.com/dongfengPakistan